




TECHNICAL PROPERTIES



EN388

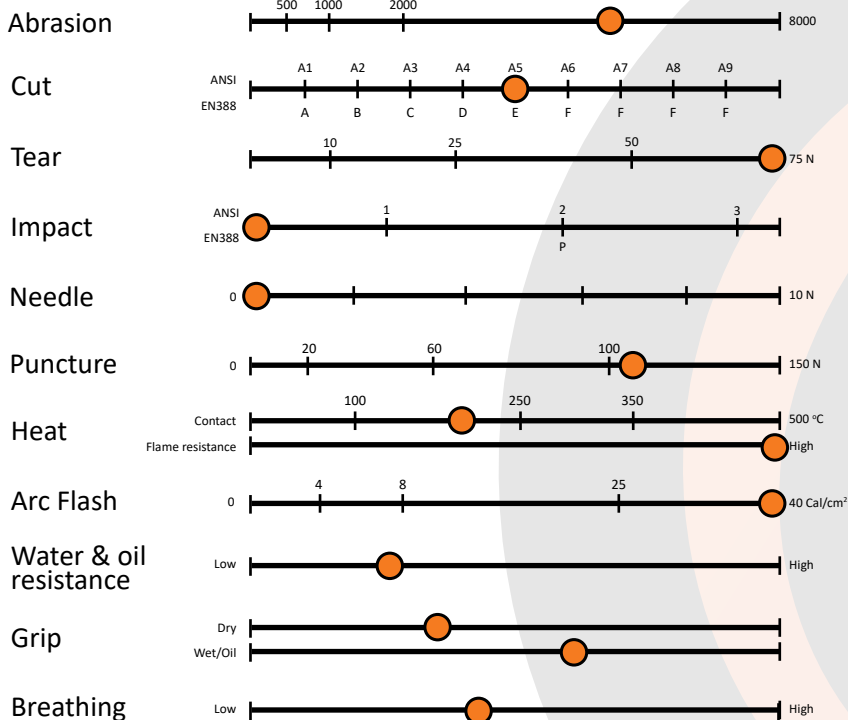

A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
F: ISO CUT (A-F)
P: IMPACT PROTECTION

3X43E

EN407



A: FLAMMABILITY (1-4)
B: CONTACT HEAT (1-4)
C: CONVECTIVE HEAT (1-4)
D: RADIAL HEAT (1-4)
E: SMALL SPLASHES OF MOLTEN METAL (1-4)
F: LARGE QUANTITIES OF MOLTEN METAL (1-4)

41324X

ARC FLASH

ASTM F2675, ATPV=

59 Cal/cm² (back of hand)

42 Cal/cm² (palm)

EN 61482 Modified by Aitex (Box Test)=

Class 2

NFPA 70E=

Level 4

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | ≥ 22 N
F | > 30 N




CE 1493
CAT III

ART.NO: 13-4HAF-50
12 pairs (1 dozen)/Carton

8	9	10	11	12
S	M	L	XL	XXL



TEKNISKA EGENSKAPER

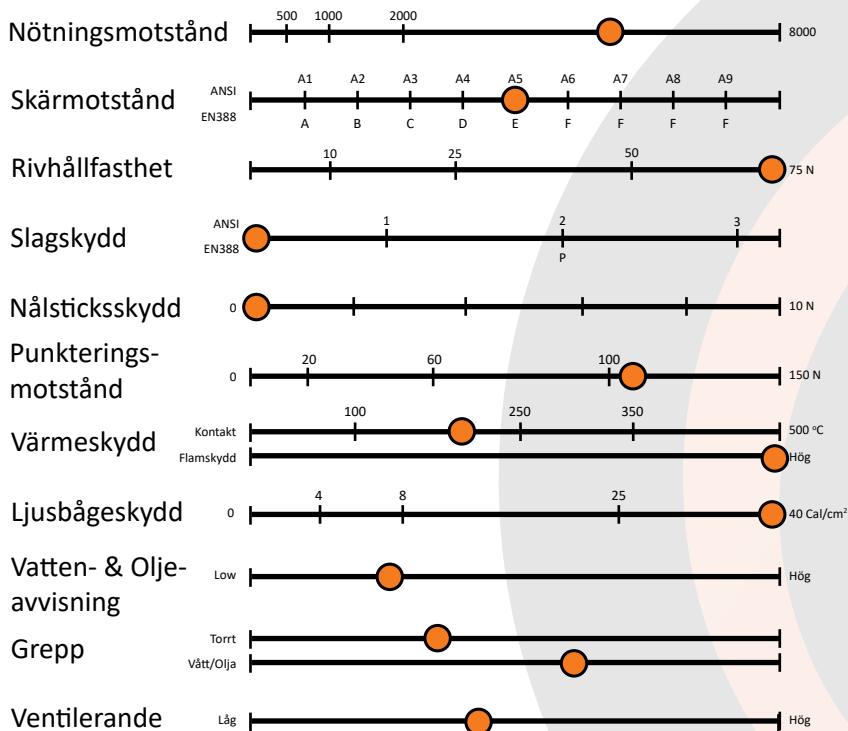

EN388



3X43E

A: NÖTNINGSMOTSTÅND (1-4)
B: SKÄRMOTSTÅND (1-5)
C: RIVHÅLLFASTHET (1-4)
D: PUNKTERINGSMOTSTÅND (1-4)
F: ISO SKÄRBESTÄNDIGHET (A-F)
P: SLAGSKYDD (P=godkänd)

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | ≥ 22 N
F | > 30 N



EN407



41324X

ARC FLASH

ASTM F2675, ATPV=
59 Cal/cm² (bakhand)
42 Cal/cm² (handflata)

EN 61482 Modified by Aitex (Box Test)=
Class 2

NFPA 70E=
Level 4


Art.nr: 13-4HAF-50
12 par (1 dussin)/Kartong

CE 1493
CAT III

8	9	10	11	12
S	M	L	XL	XXL



TECHNISCHE EIGENSCHAFTEN

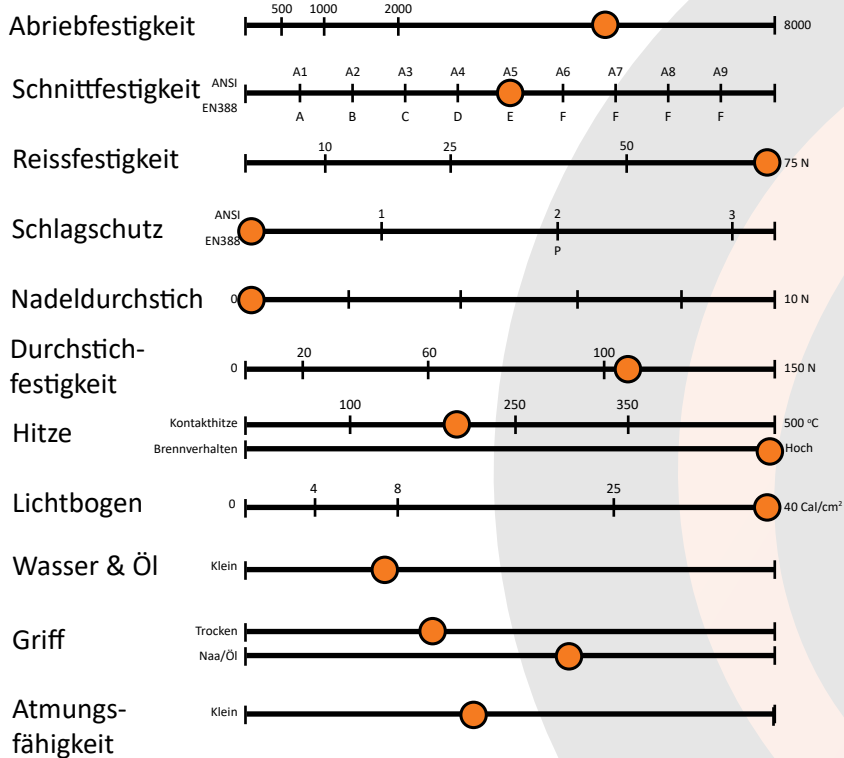

EN388



3X43E

EN407



41324X

ARC FLASH

ASTM F2675, ATPV=

59 Cal/cm² (handrücken)

42 Cal/cm² (handfläche)

EN 61482 Modified by Aitex (Box Test)=

Class 2

NFPA 70E=

Level 4

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N




Art.nr: 13-4HAF-50
12 paar (1 dutzend)/Karton

CE 1493
CAT III

8	9	10	11	12
S	M	L	XL	XXL



PROPRIETÀ TECNICHE

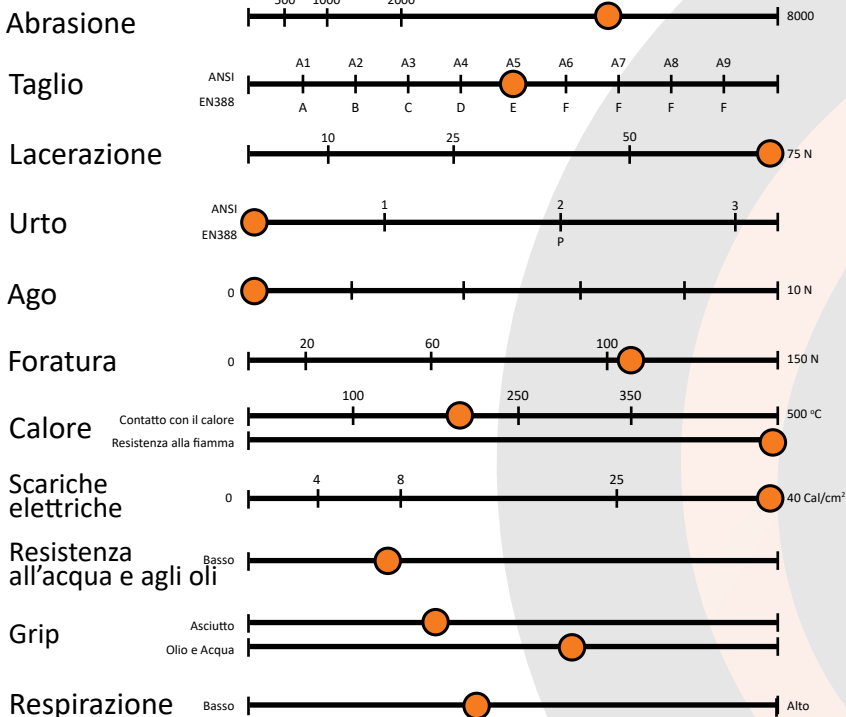

EN388



3X43E

EN407



41324X

ARC FLASH

ASTM F2675, ATPV=

59 Cal/cm² (dorso della)

42 Cal/cm² (palma)

EN 61482 Modified by Aitex (Box Test)=

Class 2

NFPA 70E=

Level 4

ISO (A-F)

A | > 2 N

B | ≥ 5 N

C | ≥ 10 N

D | ≥ 15 N

E | > 22 N

F | > 30 N




ART.NO: 13-4HAF-50
12 paia (1 dozen)/Cartone

CE 1493
CAT III

8	9	10	11	12
S	M	L	XL	XXL



PROPIEDADES TÉCNICAS

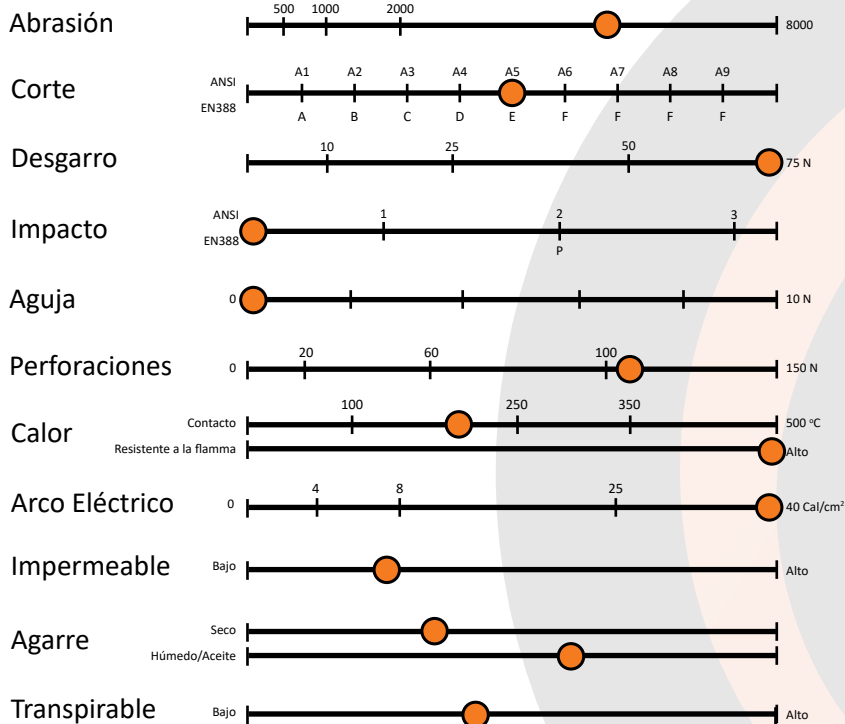

EN388



3X43E

EN407



41324X

ARC FLASH

ASTM F2675, ATPV=

59 Cal/cm² (parte de atrás de la mano)

42 Cal/cm² (palma)

EN 61482 Modified by Aitex (Box Test)=

Class 2

NFPA 70E=

Level 4

ISO (A-F)

A | > 2 N

B | ≥ 5 N

C | ≥ 10 N

D | ≥ 15 N

E | ≥ 22 N

F | > 30 N




ART.NO: 13-4HAF-50
12 pares (1 docena)/Cartón

CE 1493
CAT III

8	9	10	11	12
S	M	L	XL	XXL



WŁAŚCIWOŚCI TECHNICZNE

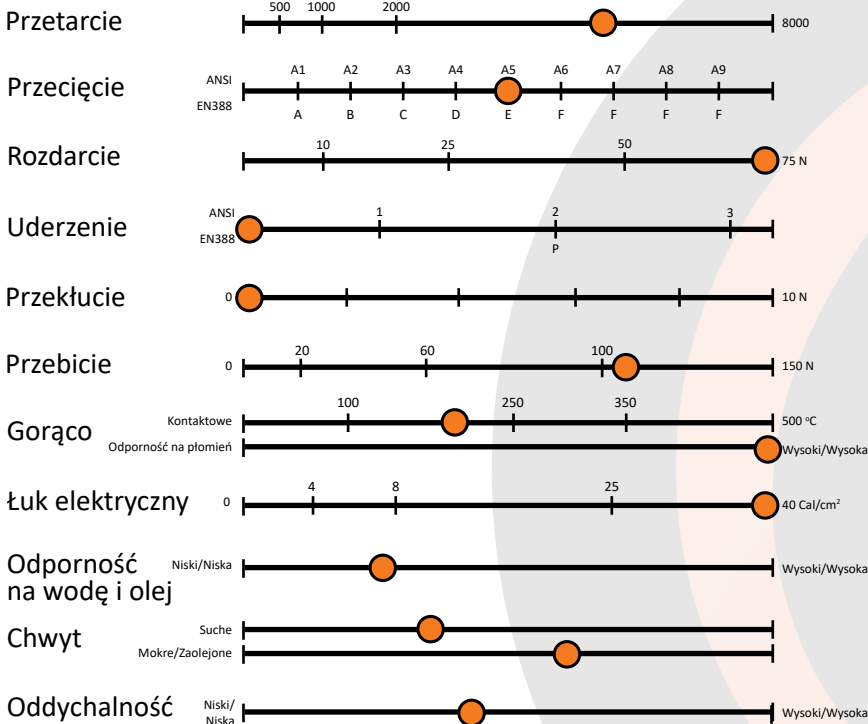

EN388



3X43E

EN407



41324X

ARC FLASH

ASTM F2675, ATPV=
59 Cal/cm² (Góra dłoni)
42 Cal/cm² (dłoni)

EN 61482 Modified by Aitex (Box Test)=
Class 2

NFPA 70E=
Level 4

CE 1493
CAT III

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | ≥ 22 N
F | > 30 N



ART.NR: 13-4HAF-50
12 par (1 tuzinów) /karton

8	9	10	11	12
S	M	L	XL	XXL